

# Vacupor<sup>®</sup> PS

Vacuum-Insulation-Panel (VIP) with polystyrene protection

## Characteristics

Vacupor<sup>®</sup> PS is a microporous insulation material with an extremely low coefficient of thermal conductivity, i.e. with very good insulating properties.

Vacupor<sup>®</sup> PS consists of inorganic oxides. The main constituent is fumed silica, the other components are opacifiers for minimizing infrared radiation, and silicates.

Vacupor<sup>®</sup> PS (core material) is not flammable and meets the requirements of IMO FTPC part 1 and DIN ISO 4102 part 1, A1.

Vacupor<sup>®</sup> PS is heat sealed in a barrier film under vacuum. The very low internal pressure and the microporous panel core is responsible for the extremely low thermal conductivity values.

## Application

Vacupor<sup>®</sup> PS was specially developed for applications in vacuum insulation technology. The low density and the specially developed IR opacifiers contained in these grades greatly reduce the thermal conductivity of Vacupor<sup>®</sup> PS Systems.

Due to the single- or double-sided coverage with polystyrene sheets, Vacupor<sup>®</sup> PS is excellently suitable for all kinds of wall and floor layings.

The fixing of the insulation is substantially facilitated, through the possibility of bonding with commercial polystyrene adhesives.

Vacupor<sup>®</sup> PS is offered in two versions:

- Vacupor<sup>®</sup> PS 10/10, 10mm thick coating on both sides
- Vacupor<sup>®</sup> PS 10/20 with 10 mm and 20 mm coating for the use as an EWIS.

### Vacupor<sup>®</sup> PS offers different advantages, like e.g.:

- Increase of the heat support ability
- Decrease of weight and insulation volume
- Decrease of the land consumption

### Vacupor<sup>®</sup> PS is also successfully used as insulation material in the following areas:

- External Wall Insulation Systems (EWIS)
- Reveal insulation
- Insulation of basement ceilings



## Form of delivery

### 1. Standard sizes:

- 1000 mm x 500 mm
- 500 mm x 500 mm
- 500 mm x 250 mm

### 2. Standard thicknesses (without protection):

- 10 mm, 15 mm, 20 mm, 25 mm, 30 mm
- Further thicknesses on request

### 3. Special formats available on request

## Restrictions on Applications

The laminated aluminum foil of the Vacupor<sup>®</sup> PS must not be damaged by drilling, cutting, milling, nailing or the like, since the interior pressure of the panel will rise and the special properties of the panel, in particular its excellent insulation characteristics, will be lost.

## Shelf life

Vacupor<sup>®</sup> PS has a very long shelf life. Please also observe our pressure rise table: Thermal conductivity as a function of interior pressure.

## Composition

|                  |                  |             |
|------------------|------------------|-------------|
| Silicon dioxide  | SiO <sub>2</sub> | approx. 80% |
| Silicium carbide | SiC              | approx. 15% |
| Others           |                  | approx. 5%  |

**Product data**

| Properties<br>(applicable to standard format) | Comments  | Standards   | Units                  | Values             |
|---|---|---|------------------------|--------------------|
| Color   | Caused by film / coverage   |   |                        | Silver / White     |
| Density <sup>1</sup>                          |   |   | kg / m <sup>3</sup>    | 150-300            |
| Thermal conductivity <sup>2</sup>             | @ 1 mbar <sup>3</sup><br>@ ambient pressure   | Measured at 22,5 °C (72.5 °F) mean temperature<br>DIN 52612 | W / (m×K)<br>W / (m×K) | ≤ 0,005<br>≤ 0,019 |
| U-Value                                       |   |   | W / (m <sup>2</sup> K) |                    |
|   |   |   | Thickness VIP [mm]     |                    |
|   |   |   | 10                     | 20                 |
|   | Vacupor PS 10/10  | 0,40  | 0,23                   | 0,16               |
|   | Vacupor PS 10/20  | 0,36  | 0,21                   | 0,15               |
| Heat resistance <sup>4</sup>                  | Caused by film weld seam  |   | °C                     | -50 < T < 120      |
| Maximum film projection                       |   |   | mm                     | 0                  |
| Interior pressure <sup>3</sup>                | As delivered  |   | mbar                   | ≤ 5                |
| Theoretical pressure rise                     | Under standard conditions   |   | mbar / a               | 0,5                |
| Maximum panel dimensions                      | Length  |   | mm                     | 150 - 2200         |
|   | Breadth   |   | mm                     | 150 - 1000         |
|   | Thickness   |   | mm                     | 10 - 50            |
| Length and width tolerances                   | 0 bis 500 mm  |   | mm                     | + 1,0 / - 2,0      |
|   | 501 bis 1000 mm   |   | mm                     | + 1,0 / - 4,0      |
|   | > 1000  |   | mm                     | + 1,0 / - 6,0      |
| Thickness tolerances                          | < 20 mm   |   | mm                     | ± 1,0              |
|   | 20 mm bis 30 mm   |   | mm                     | + 1,0 / - 2,0      |
|   | > 30 mm   |   | mm                     | + 1,0 / - 3,0      |
| Thermal shock resistance                      | Vacupor <sup>®</sup> PS (core material) is insensitive to high and low temperature thermal shocks |   |                        |                    |

<sup>1</sup> Dependent on board thickness


<sup>2</sup> Only applicable for Vacupor<sup>®</sup> NT without coverage

<sup>3</sup> Dependent on the panel-size and -thickness, internal pressure can be between 0.5 – 5 mbar. The standard internal pressure in the evacuation chamber is < 0.5 mbar.

<sup>4</sup> The limits are fixed by the barrier film (sealing material) used; constant load: ≤ 80°C (176°F); short load time with 120°C (248°F): roughly 30 minutes.


The above data are only intended as a guide and should not be used in preparing specifications.

**Thermal conductivity as a function of internal pressure ( DIN 52612 )**

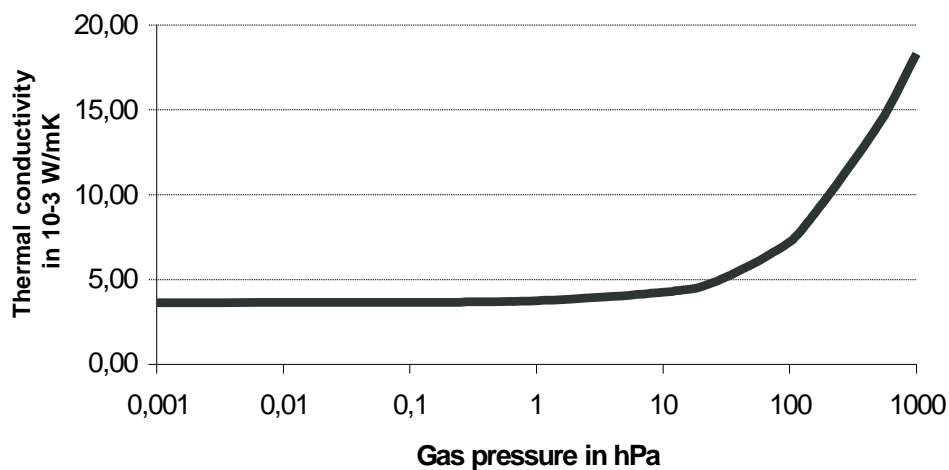


| gas pressure $p_{gas}$<br>[ hPa ] | U- Value<br>[ W/(m <sup>2</sup> K) ] | $\lambda$<br>[ 10 <sup>-3</sup> W/(mK) ] |
|-----------------------------------|--------------------------------------|--|
| < 10 <sup>-3</sup>                | 0.187                                | 3.63                                     |
| 0.1                               | 0.188                                | 3.66                                     |
| 1.0                               | 0.193                                | 3.75                                     |
| 10                                | 0.219                                | 4.25                                     |
| 150                               | 0.448                                | 8.70                                     |
| 1000                              | 0.943                                | 18.30                                    |


**Thermal conductivity (panel core) DIN 52612**

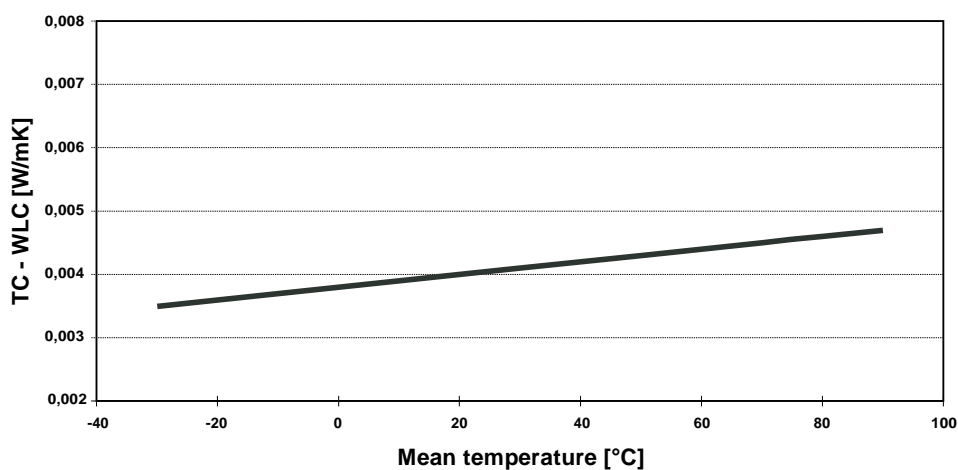

**Compression behavior (panel core)**

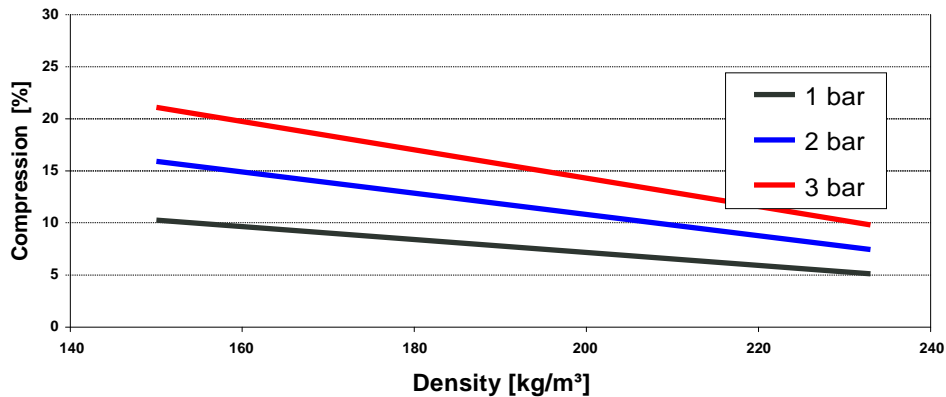

**Low-temp. Compression strength (panel core)**

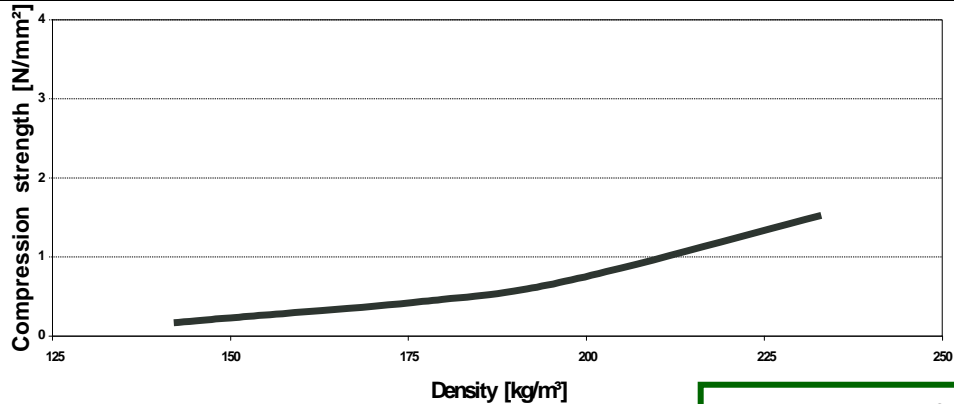

**Safety directions**

Vacupor<sup>®</sup> PS is not a hazardous material as defined in EU directive 2006/1907/EEC.

Please also observe our material safety data sheet.

Vacupor<sup>®</sup> PS does not liberate hazardous decomposition products and, as far as is known at present, does not cause any problems to human health or the environment.

**For Further Information Contact:**

EnviroHomes Ltd  
Blyth CEC  
Ridley St,  
Blyth.  
NE24 3AG.

Tel: 01670 542857

Fax: 01670 542898

Email: [enquiry@envirohomes.co.uk](mailto:enquiry@envirohomes.co.uk)

Web: [www.envirohomes.co.uk](http://www.envirohomes.co.uk)

The data presented in this leaflet are in accordance with the present state of our knowledge, but do not absolve the user from carefully checking all supplies immediately on receipt. We reserve the right to alter product constants within the scope of technical progress or new developments. The recommendations made in this leaflet should be checked by preliminary trials because of conditions during processing over which we have no control, especially where other companies' raw materials are also being used. The recommendations do not absolve the user from the obligation of investigating the possibility of infringement of third parties' rights and, if necessary, clarifying the position. Recommendations for use do not constitute a warranty, either express or implied, of the fitness or suitability of the product for a particular purpose.



and Vacupor<sup>®</sup> are registered trademarks of Porextherm GmbH.

Version 1.02 08-02-15

Please address all technical questions that affect quality and product safety to:

Porextherm Dämmstoffe GmbH  
Heisinger Strasse 8  
D-87437 Kempten

[www.porextherm.com](http://www.porextherm.com)  
[info@porextherm.com](mailto:info@porextherm.com)



DIN EN ISO 9001:2000  
Zertifikat: 01 100 030449